



CONTROL OF THE COLD CHAIN



Integrated insulated cargo area for
TOYOTA PROACE
2016 MODEL



**Designer and manufacturer of
integrated insulated cargo areas**

Trimat has designed an insulated range for professionals, combining functionality, aesthetics and long life.



INTEGRATED INSULATED CARGO AREA FOR TOYOTA PROACE 2016 MODEL


The various Iso-Kit fitting-out configurations

| Reference | Name |
|-----------|---|
| EKI0161 | ISO-KIT insulation PROACE COMPACT with right side door |
| EKI0162 | ISO-KIT insulation PROACE COMPACT without side door |
| EKI0163 | ISO-KIT insulation PROACE COMPACT with right side door and semi-recessed roof |
| EKI0164 | ISO-KIT insulation PROACE COMPACT without side door and semi-recessed roof |
| EKI0169 | ISO-KIT insulation PROACE MEDIUM with right side door |
| EKI0170 | ISO-KIT insulation PROACE MEDIUM without side door |
| EKI0171 | ISO-KIT insulation PROACE MEDIUM with right side door and semi-recessed roof |
| EKI0172 | ISO-KIT insulation PROACE MEDIUM without side door and semi-recessed roof |
| EKI0177 | ISO-KIT insulation PROACE LONG with right side door |
| EKI0178 | ISO-KIT insulation PROACE LONG without side door |
| EKI0179 | ISO-KIT insulation PROACE LONG with right side door and semi-recessed roof |
| EKI0180 | ISO-KIT insulation PROACE LONG without side door and semi-recessed roof |

Please ask us for the IN (Normal Insulation) versions

Dimensions

| | Compact | Medium | Long |
|------------------------------|--------------------|--------------------|--------------------|
| Interior length | 1734 | 2074 | 2434 |
| Interior width | 1282 | 1282 | 1282 |
| Between wheel arches | 1220 | 1220 | 1220 |
| Width between the rear doors | IN 1220 | 1220 | 1220 |
| | IR 1134 | 1134 | 1134 |
| Interior height | 1178 | 1178 | 1178 |
| Volume | 2.6 m ³ | 3.2 m ³ | 3.7 m ³ |

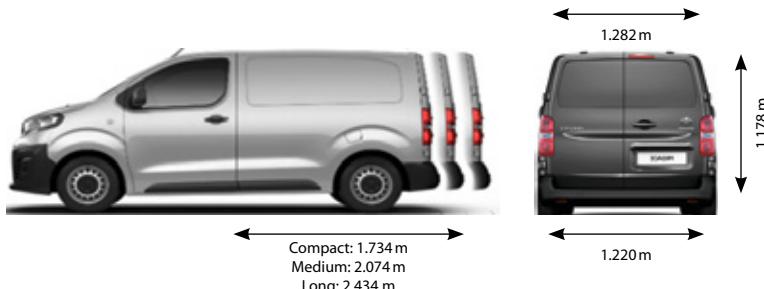

Mounting and fairing for refrigeration unit

| Reference | Name |
|-----------|---|
| EKI0185 | ISO-KIT Semi-recessed mounting PROACE |
| EKI0186 | ISO KIT Aérotop Semi-recessed mounting and fairing PROACE |



Characteristics

IR: Enhanced Insulation with or without side door

IN: Normal Insulation with or without side door (Please ask us)

- Cemafroid Certification No. D14/001
- Antibacterial food-grade gelcoat
- Water drain with stainless-steel grating
- Ceiling light (watertight as an option)
- Aluminium door sills



OPTIONS AND ACCESSORIES

Customisation and multiple accessories as an option (shelves, plinths, aluminium floor, mounting and fairing...) Please ask us.